
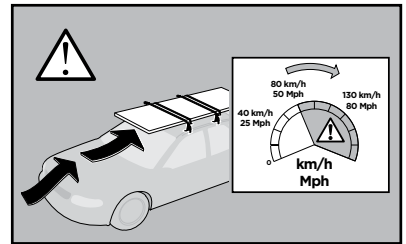
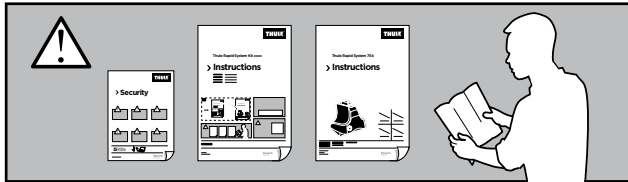
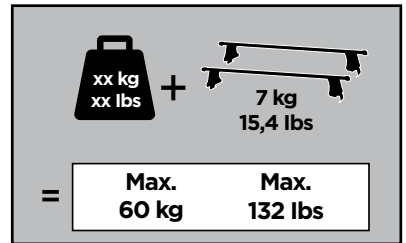





Thule Rapid System Kit 1644

> Instructions


PEUGEOT 508, 4-dr Sedan, 11-

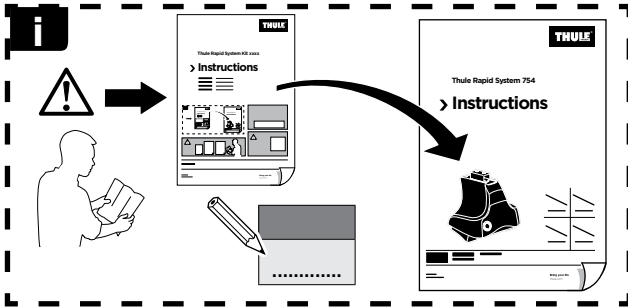

ISO 11154-E





x1



x1

1



	X (scale)	X (mm)	X (inch)
PEUGEOT 508, 4-dr Sedan, 11-	39,5	1046	41 ¹ / ₈

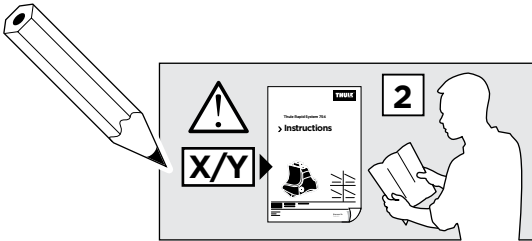



	Y (scale)	Y (mm)	Y (inch)
PEUGEOT 508, 4-dr Sedan, 11-	37	1021	40 ¹ / ₄

2

PEUGEOT 508, 4-dr Sedan, 11-

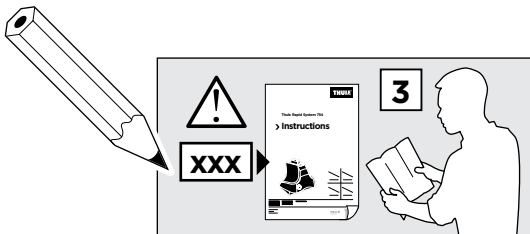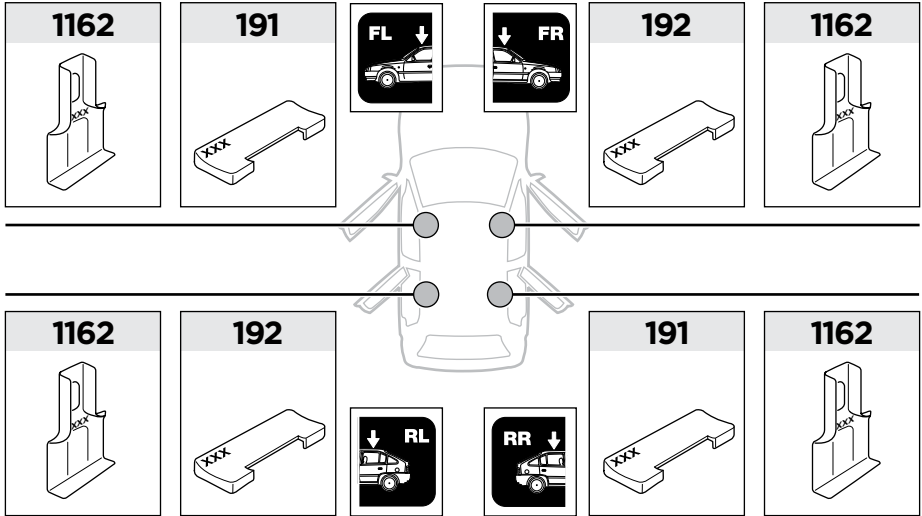

3

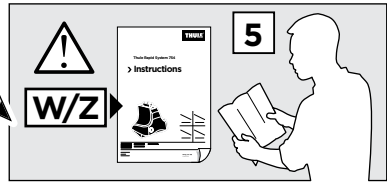

	W (mm)	Z (mm)	W (inch)	Z (inch)
PEUGEOT 508 , 4-dr Sedan, 11-	265	725	10 ³/₈	28 ¹/₂

