
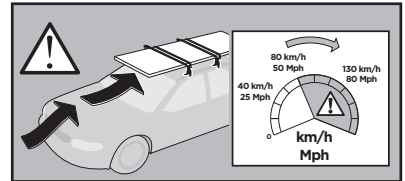
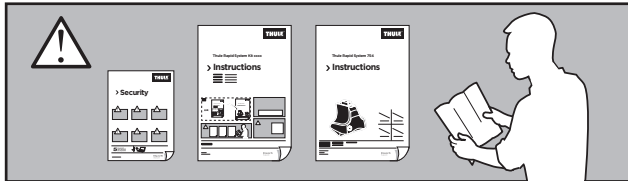
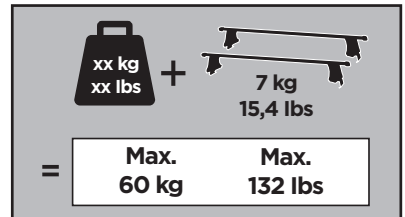
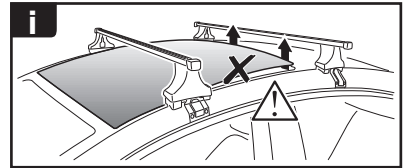


Thule Rapid System Kit 1693

> Instructions


KIA Ceed, 5-dr Hatchback, 12- (With glassroof)
KIA Cerato, 5-dr Hatchback, 13-

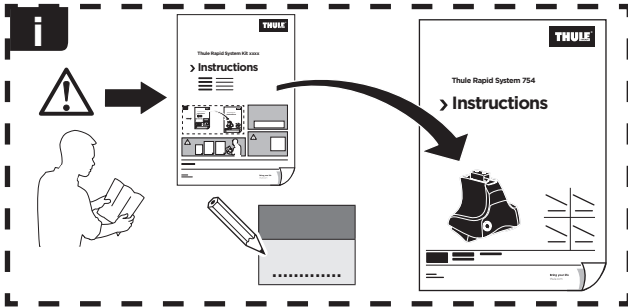


ISO 11154-E




07 x2



249 x1



250 x1




368 x2



798 x2





x1



x1

1

	X (scale)	X (mm)	X (inch)
KIA Ceed, 5-dr Hatchback, 12- (With glassroof)	36,5	1016	40
KIA Cerato, 5-dr Hatchback, 13-	41,5	1066	42


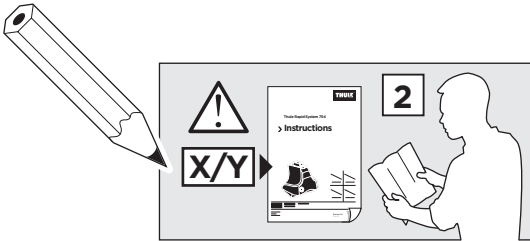



	Y (scale)	Y (mm)	Y (inch)
KIA Ceed, 5-dr Hatchback, 12- (With glassroof)	30	951	37 1/2
KIA Cerato, 5-dr Hatchback, 13-	37	1021	40 1/4

2

KIA Ceed, 5-dr Hatchback, 12- (With glassroof)

KIA Cerato, 5-dr Hatchback, 13-

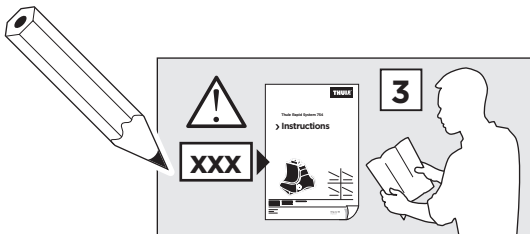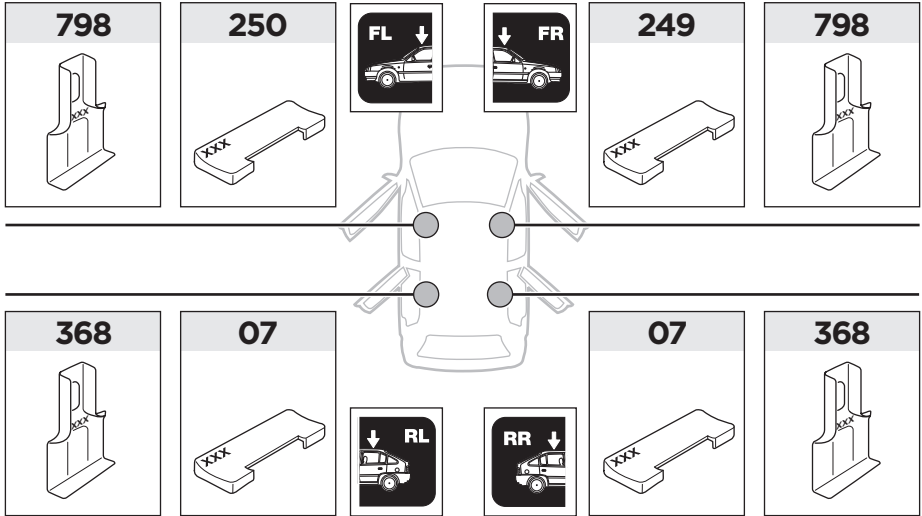

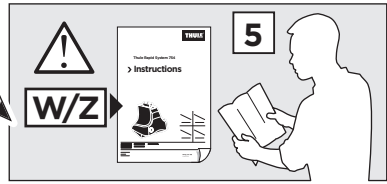3

	W (mm)	Z (mm)	W (inch)	Z (inch)
KIA Ceed , 5-dr Hatchback, 12- (With glassroof)	300	700	11 ³/₄	27 ¹/₂
KIA Cerato , 5-dr Hatchback, 13-	300	700	11 ³/₄	27 ¹/₂

